

HYUNDAI AIRPORT



042 111 111 991

PORTER H-100



HYUNDAI AIRPORT

SPECIFICATIONS

Engine	
Type	2.6L Euro II diesel natural aspirated
Bore x Stroke (mm)	91.1 x 100
Compression Ratio	22 : 1
Max. Power (ps/rpm)	79 @4,000
Max.Torque (nm/rpm)	167 @ 2,200
Valve System	Single overhead camshaft, 2 valves / cylinder
Fuel System	Min-Max type governor, bosch type injection pump
Fuel type	Diesel
Fuel Tank (l)	65
Suspension	
Front	Double Wishbone & Torsion Bar with ø 25mm Stabilizer Bar
Rear	Semi-elliptic Laminated Leaf Springs
Load capacity	
Load Area	4539 mm ²
Maximum Towing Weight (Braked Trailer)	1 Ton
Steering	
Type	Hydraulic Power Assisted (Rack and Pinion with Collapsible Universal Joint and Column)
MinimumTurning Radius (m)	5,3
Wheels and Tyres	
Wheel	Steel Rim 6.0J x 15"
Tyre (mm)	195 / 70 R15 C
Spare Tyre	Full Size Steel Rim
Brakes	
Front (mm)	ø 274 mm Ventilated disc
Rear (mm)	ø 260 mm Solid Drum
Load Sensing Proportioning Valve	Standard
Brake Booster	8 + 9" Tandem
Drivetrain	
Transmission	5 speed Manual

APPLICATIONS



FLAT DECK


AMBULANCE

SECURITY VAN

REFRIGERATOR VAN

DELIVERY VAN

DIMENSIONS

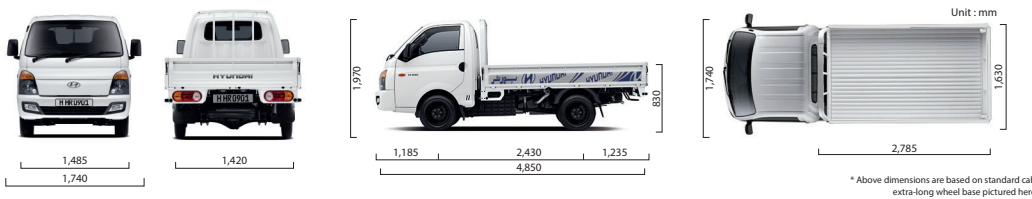

* Above dimensions are based on standard cab extra-long wheel base pictured here

FEATURES



Hood



Efficient gauge cluster design



AM/FM/BT/AUX/USB Audio System



Rear Flat High Deck




Roomy Interior



Naturally Aspirated 2.6L diesel engine

Disclaimer: For exact models, specifications and colors – please consult your Hyundai dealer. Some of the equipment illustrated or described in this leaflet may not be supplied as standard equipment and may be available at extra cost. Hyundai Nishat Motor (Private) Limited reserves the right to change specifications and equipment without prior notice.

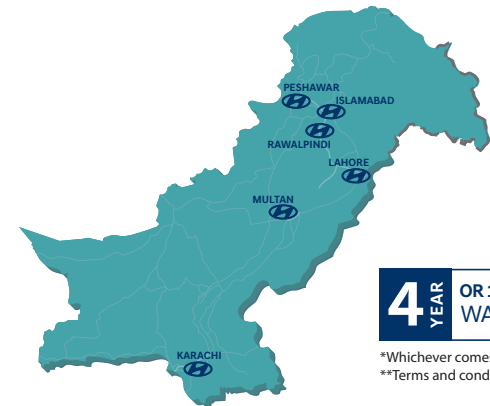

4 YEAR OR 100,000 Km WARRANTY

*Whichever comes first
**Terms and conditions apply



Hyundai Nishat Motor (Pvt.) Ltd.
1-B, Aziz Avenue, Canal Bank Road, Gulberg V, Lahore
Phone +92-42-111 111 466, www.hyundai-nishat.com
hyundaipakistan